

Automated Guided Vehicle
Sparq Mini



"Affordable. Easy to Install"

Ideasparq
— ROBOTICS SDN BHD

Specifications

| | |
|----------------------|---|
| Navigation Type | Magnetic Strip Guidance |
| Payload Capacity | 200 Kg (Tow) 150 Kg (Load) |
| Speed | 0.7 m/s |
| Battery Type | SLA / Lithium ion (optional) |
| Running Time | 6 hours |
| Charging Time | 5 hours |
| Charging Type | Manual / Battery swap |
| Motor Type | In-wheel hub Motor (Brushless) |
| Travelling Direction | Single Directional (looping) |
| Turning Radius | 90 degree |
| Safety Features | Obstacle Sensor Safety Bumper Emergency Stop Button |
| Dimension | 800 x 520 x 280 mm |

Advantages



Compact



Easy



Low Cost




Flexible



Safe



Hassle-free

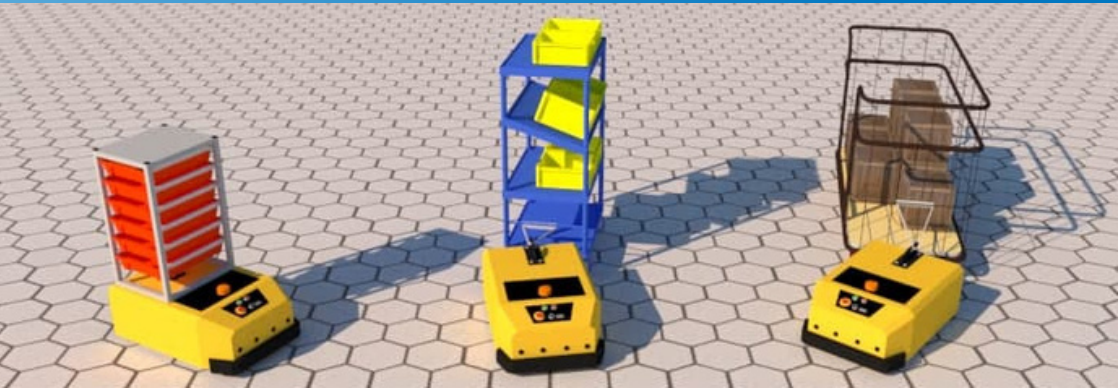


IDEASPARQ ROBOTICS SDN. BHD.

Lot PT 31563 (2790),
Persiaran Elektron,
Seksyen U16, Kg Melayu Subang,
40160 Shah Alam,
Selangor Darul Ehsan, Malaysia.

+6018 251 8931 / +6010 532 2996

sales_team@ideasparq.com

 ideasparq.com

 ideasparqrobotics

 ideasparqrobotics

 ideasparqrobotics sdn bhd

 ideasparq


Ideasparq
ROBOTICS SDN BHD