


Automated Guided Vehicle Sparq 1

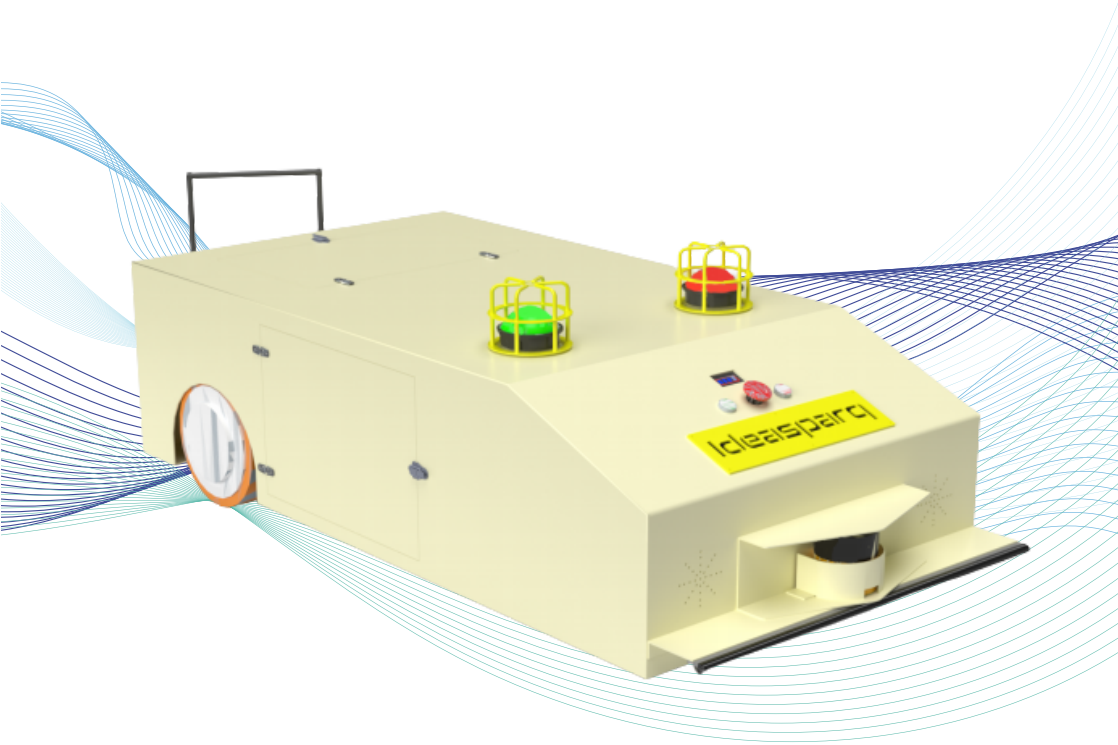

"Industrial Standard, Robust"

Ideasparq
ROBOTICS SDN BHD

Specifications

Navigation Type	Magnetic Strip Guidance
Payload Capacity	1000 Kg (Tow)
Speed	1 m/s
Battery Type	SLA / Lithium ion (optional)
Running Time	12 hours
Charging Time	2.5 hours
Charging Type	Manual / Battery swap
Motor Type	In-wheel hub Motor (Brushless)
Travelling Direction	Single Directional (looping)
Turning Radius	90 degree
Safety Features	Obstacle Sensor Safety Bumper Emergency Stop Button
Dimension	600 x 1150 x 300 mm

Advantages



Compact



Easy



Low Cost



Flexible



Safe



Hassle-free




IDEASPARQ ROBOTICS SDN. BHD.


Lot PT 31563 (2790),
Persiaran Elektron,
Seksyen U16, Kg Melayu Subang,
40160 Shah Alam,
Selangor Darul Ehsan, Malaysia.

+6018 251 8931 / +6010 532 2996

sales_team@ideasparq.com

 ideasparq.com

 ideasparqrobotics

 ideasparqrobotics

 ideasparqrobotics sdn bhd

 ideasparq


Ideasparq
ROBOTICS SDN BHD